

Table A.4 Port Canaveral Nearshore Disposal : 14-1/2 Month Post-Project Sediment Samples (IN-92-XX)

Sample	Florida State Plane Coordinates (ft)	Percent Passing								Estimated Shell Content (%)
		No. 40	No. 60	No. 80	No. 100	No. 140	No. 170	No. 200	No. 230	
IN-1-I	E 628,007 N 1,445,391	99.5	96.3	93.5	90.6	43.6	35.0	20.3	12.3	0.5
IN-2-I	E 628,449 N 1,454,570	99.8	97.4	93.3	90.8	43.7	31.6	20.2	12.7	0.2-1.5
IN-3-I	E 628,008 N 1,455,110	99.6	98.5	97.0	89.5	37.7	29.4	15.6	9.5	0.4-1.0
IN-4-I	E 628,572 N 1,449,821	99.3	98.2	96.8	95.2	51.8	38.9	24.7	16.9	0.7-1.3
IN-5-I	E 628,280 N 1,452,715	99.6	98.8	97.3	94.0	43.7	31.5	19.5	12.8	0.4-1.0
IN-6-I	E 628,519 N 1,453,750	99.7	99.1	97.2	93.3	38.8	30.9	20.9	13.9	0.5-1.0
IN-7-I	E 628,200 N 1,454,761	99.0	98.5	95.6	92.2	38.3	28.9	15.7	10.0	1.0-1.3
IN-8-I	E 628,300 N 1,453,469	99.8	99.4	98.2	96.4	44.3	33.8	20.1	12.8	0.2-0.4
IN-9-I	E 628,759 N 1,454,241	99.6	99.0	97.8	96.3	55.7	42.6	27.9	19.2	0.4-0.7
IN-10-I	E 627,600 N 1,455,137	99.8	99.6	98.0	93.4	33.6	24.2	13.4	7.7	0.2-0.3
IN-11-I	E 627,173 N 1,453,046	99.7	99.4	97.5	93.0	21.2	14.2	7.3	4.1	0.3-0.5
IN-12-I	E 627,950 N 1,453,814	97.9	96.7	89.5	80.0	26.4	20.3	13.9	10.0	2.0-2.5
IN-13-I	E 627,750 N 1,453,905	96.5	94.7	87.5	76.7	21.4	15.5	9.9	6.7	3.5
IN-14-I	E 628,242 N 1,453,600	99.9	99.3	86.4	67.3	11.3	6.7	3.5	2.3	0.1

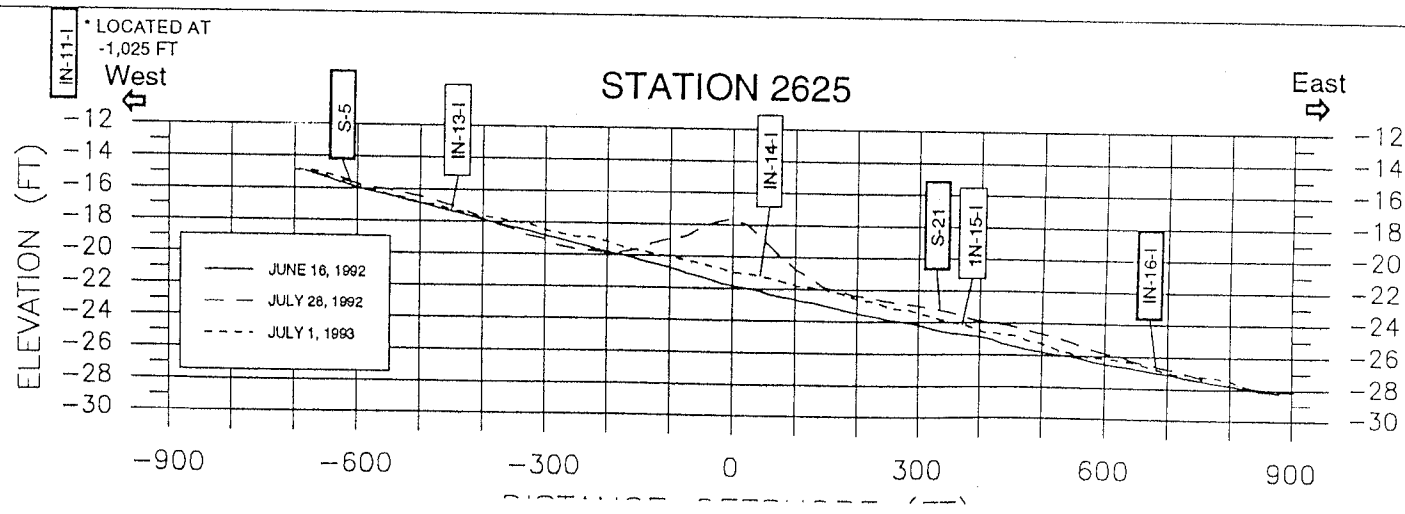
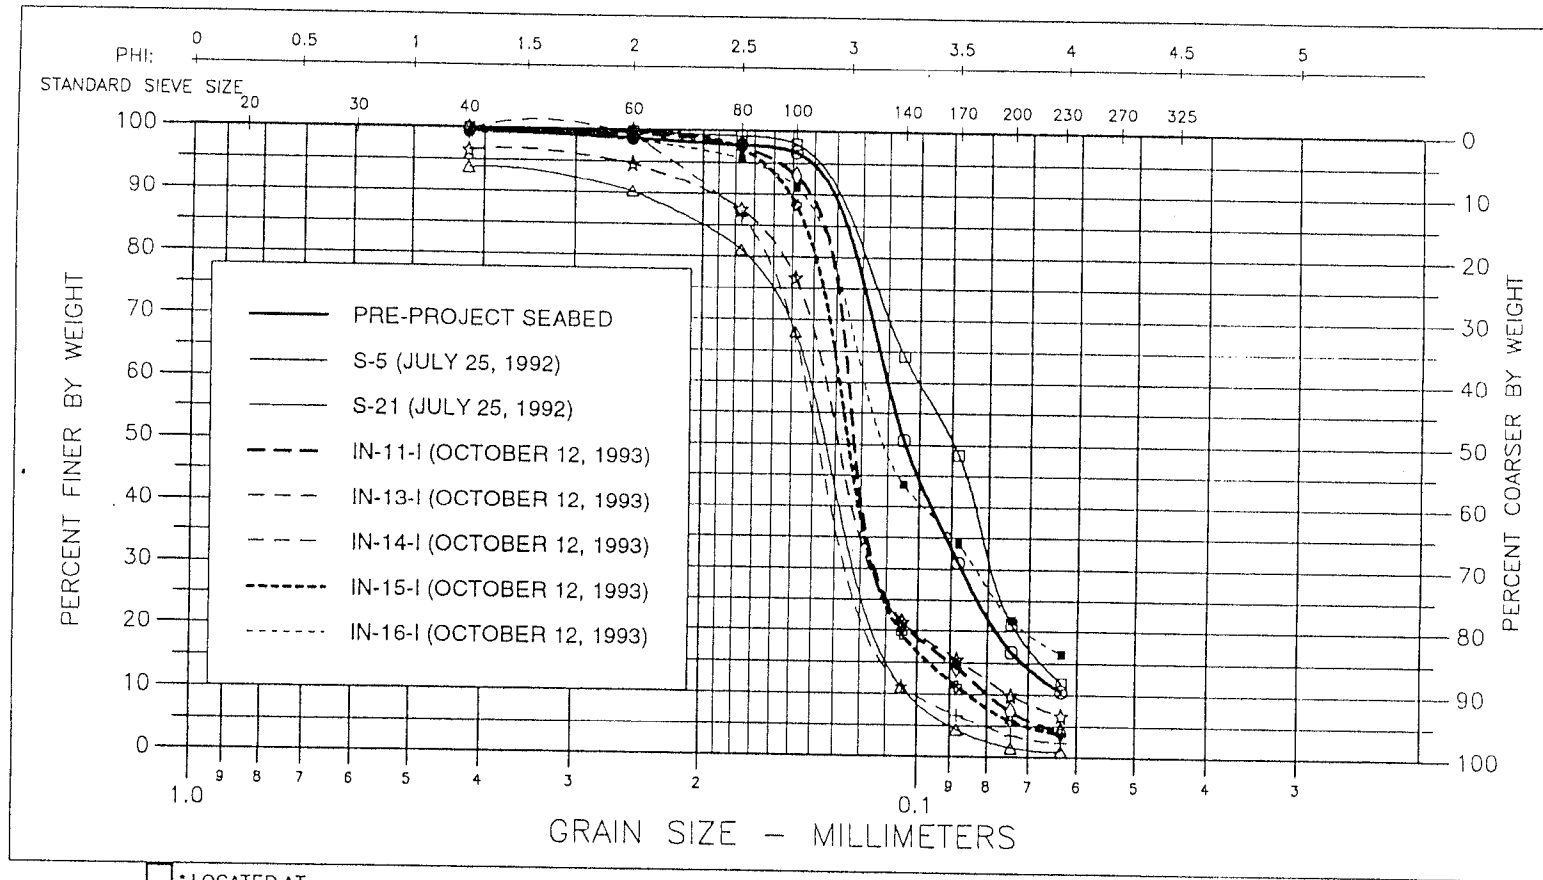


Figure C.6 Cross-Shore Sediment and Bathymetric Data : Station 2625.