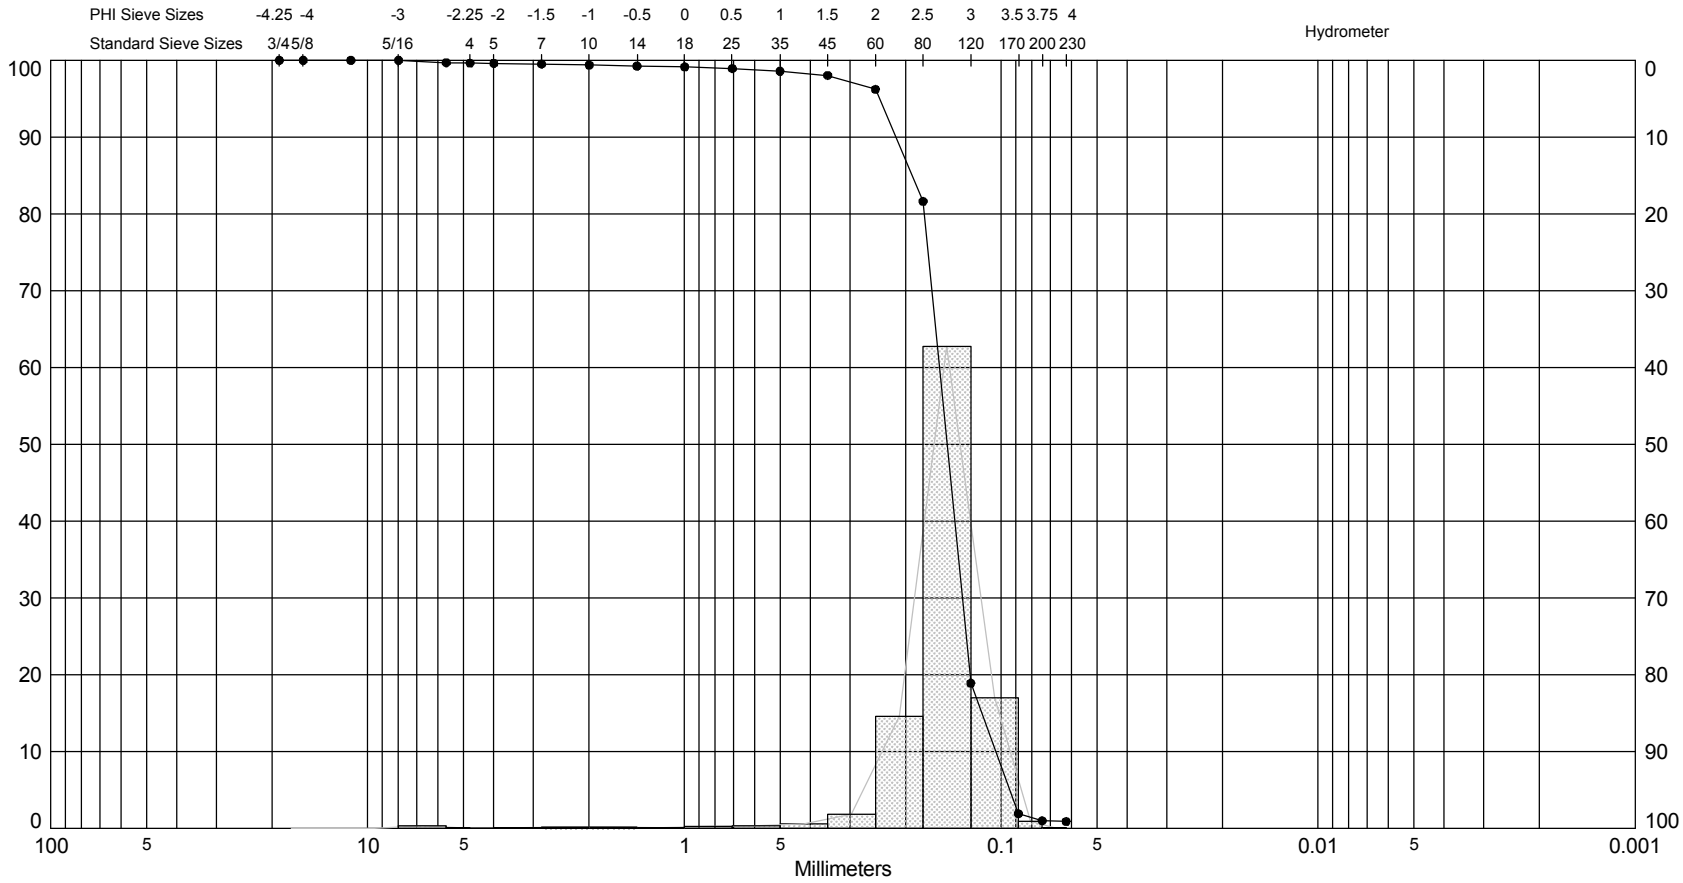


| Sample | Symbol | Elev. (ft) | USCS | % Fines | % Organics | % Carbonates | Median | Mean | Skew | Kurt | Sort |
|---|---|---|---|---|---|---|---|---|---|---|---|
| LKVC-06-03 #1 | —●— | -13.0 | SP | #200 - 0.98<br>#230 - 0.88 | | | 2.75 | 2.69 | -4.94 | 41.64 | 0.57 |

Comments:

Depths and elevations based on measured values

| Sample Information | |
|---|---|
| Project Name: | Lido Key Sand Search |
| Analysis Date: | 01-24-06 |
| Analyzed By: | AMS |
| Easting (X, ft): | 462,825 |
| Northing (Y, ft): | 1,086,414 |
| Horizontal System: | NAD 1983 |
| Vertical System: | NAVD 88 |

Coastal Planning & Engineering
2481 NW Boca Raton Blvd, Boca Raton
FL 33431
ph (561) 391-8102
fax (561) 391-9116

SIEVE ANALYSIS LIDO_06_VC.GPJ FL DEP ROSS.GDT 2/28/06